

VS-800

Vital Signs Monitor

Technical Specifications

Safety
Meet the requirements of IEC60601 series, CE marking according to MDD93/42/EEC

Dimension and Weight
Dimension: 170mm (W) x 240mm (H) x 170mm (D)
Weight: < 3.5kg (including a battery)

Operation Environment
AC Power Requirements: 100-240 VAC (±10%), 50/60 Hz (± 3 Hz), 70 VA
Temperature: 0 - 40°C (SmarTemp™: 10-40°C)
Humidity: 15% - 95%, non-condensing

Patient Range
Adult, pediatric and neonatal

Performance Specifications
Display: 7 segment LEDs
3.4" FSTN LCD
Trace: 1 plethysmogram waveform
Sweep Speed: 25mm/s
Indicator: Alarm indicator
Power indicator
Battery indicator
Patient type indicator
Pulse strength indicator
NIBP status indicator
Silence indicator
Interface: Network port
Nurse call Interface
Trend: Flexible database lists trend for review of up to 1,200 measurements on up to 100 patients
Alarm: 3-level audible and visual alarm
Networking: Connected to Mindray central monitoring system or data exporting system
Recorder: Built-in, thermal array
Record width: 48mm(record paper 50mm)
Print speed: 25mm/s
Lead Acid Battery: Rechargeable
About 8 hours (Charging time)
About 4.5 hours (Working time)
Li-ion Battery: Rechargeable
About 8 hours (Charging time)
About 10.5 hours (Working time)

NIBP
Method: Automatic oscillometric
Operation modes: Manual/Automatic/Continual
Auto measure time: Adjustable
Measurement unit: mmHg/kPa selectable
Measurement types: Systolic, Diastolic, Mean, Pulse Rate
Measurement range: Adult: 10-270mmHg
Pediatric: 10-200mmHg
Neonate: 10-135mmHg
Over-pressure protection: YES
Resolution: 1mmHg
Alarm: Systolic, Diastolic, Mean, Pulse Rate
Pulse Rate Range: 40 - 240 bpm
Pulse Rate Resolution: 1bpm
Pulse Rate Accuracy: ±2bpm

Mindray SpO₂
Measurement range: 0~100%
Resolution: 1%
Accuracy: Adult/Pediatric: ±2% (70-100%);
Neonatal: ±3% (70-100%);
0-69% unspecified
Alarm range: 0-100%
Pulse rate: Range: 20-254bpm
Resolution: 1bpm
Accuracy: ±3bpm
Alarm range: 20-254bpm

MASIMO SpO₂
Measurement range: 0~100%
Resolution: 1%
Accuracy: ±2% (70-100%, Adult/Pediatric, non-motion);
±3% (70-100%, Neonate, non-motion);
±3% (70-100%, Adult/Pediatric/Neonate, motion);
0-69% unspecified
Alarm range: 1~100%
Pulse rate: Range: 25~240bpm
Resolution: 1bpm
Accuracy: ±3bpm (non-motion)
±5bpm (motion)
Alarm range: 25~240bpm

Nellcor OxiMax SpO₂
Measurement range: 0-100%
Compatible sensors: Nellcor sensor type: OxiMax series MAX-A, MAX-AL, MAX-N, MAX-P, MAX-I, MAX-FAST, MAX-R, OxiCliq A, OxiCliq N, OxiCliq P, OxiCliq I, D-YS, D-YSE, D-YSPD, DS-100A, OXI-A/N and OXI-P/I
SpO₂ accuracy: 70%-100% ±2%; 0-69% unspecified (sensors: MAX-A, MAX-AL, MAX-N, MAX-P, MAX-I and MAX-FAST)
70%-100% ±2.5%; 0-69% unspecified (sensors: OxiCliq A, OxiCliq N, OxiCliq P and OxiCliq I)
70%-100% ±3%; 0-69% unspecified (sensors: D-YS, DS-100A, OXI-A/N and OXI-P/I)
70%-100% ±3.5%; 0-69% unspecified (sensors: MAX-R, D-YSE and D-YSPD)
Pulse Rate: 20-250 bpm ±3 bpm
Range and accuracy: 251-300 bpm unspecified

SmarTemp™ Thermometer
Measurement range: 25 - 44°C(77 - 111.2 °F)
Resolution: In MONITOR mode: 0.1°C (0.2 °F)
Accuracy: In MONITOR mode: 25 - 32°C (77 - 89.6 °F) : ±0.2°C (±0.3 °F)
including 32 °C (89.6°F)
In MONITOR mode: 32~44°C (89.6 - 111.2 °F) : ±0.1°C (±0.2 °F)
Excluding 32 °C (89.6°F)
Typical Measurement time <12s



VS-800

Vital Signs Monitor



DISTRIBUTOR:

mindray

Mindray is listed on the NYSE under the symbol "MR"
Mindray Building, Keji 12th Road South, High-tech Industrial Park,
Nanshan, Shenzhen 518057, P.R. China
Tel: +86 755 26582888 Fax: +86 755 26582680
E-mail: intl-market@mindray.com Website: www.mindray.com

mindray
healthcare within reach



MINDRAY is a trademark of Shenzhen Mindray Bio-Medical Electronics Co., Ltd. Specifications subject to changes without prior notice.
© 2010 Shenzhen Mindray Bio-Medical Electronics Co., Ltd. All rights reserved.
P/N: ENG-VS800-420285-20100125

VS-800

Vital Signs Monitor


Parameters: NIBP, SpO₂, Temp



The Stable Design
Prevents VS-800 from slipping and tilting back when pressing the buttons



SmarTemp™ Thermometer
2 types of probes: oral/axillary probe (blue) and rectal probe (red). Probe can auto-warm up to an initial temperature to be sure of an accurate measurement. Neonatal patients are suitable for axillary measurement.

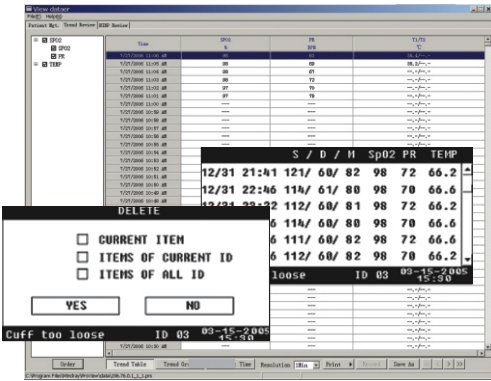

Powerful Data Storage and Management Functions
Allow you to easily keep and view patient data.
Total storage capacity: 100 patient IDs;
1200 sets of data for each parameter
All data can be transferred to a PC through Windows-based software for review and A4 paper printing.



Bar code scanner
Allow you to admit a patient quickly by using a bar code scanner, which is compatible with 1D and 2D bar code.



- Suitable for adult, pediatric and neonatal patients
- Clinical Proven SpO₂ technology
- SmarTemp™ thermometer
- Adjustable audible and visual alarms
- Central Station networking
- Removable and rechargeable battery, up to 10-hour working time
- Integrated handle and full mounting solutions

